

SOT-23 Three Terminal Adjustable Regulator 三端可调稳压 IC**■Features & Block Diagram****特点和框图**

Programmable output Voltage to 36V

输出电压可调整到 36V

Low dynamic output impedance 0.27 Ω




低动态输出阻抗 0.27 Ω

Sink current capability of 1 to 100mA

电流能力 1 到 100mA

SOT-23

1. Cathode
2. Reference
3. Anode


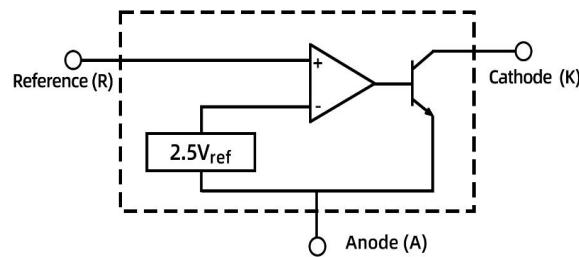



Symbol

■Absolute Maximum Ratings 最大额定值

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)







Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Cathode to Anode Voltage 阴极到阳极电压	V _{KA}	40	V
Cathode Current Range 工作电流	I _K	-100~+150	mA
Reference Input Current Range 输入电流	I _{REF}	-0.05~+10	mA
Power dissipation 耗散功率	P _D	200	mW
Thermal Resistance Junction-Ambient 热阻	R _{θJA}	625	°C/W
Solder Temperature 焊接温度/时间	T _d	260/10	°C/S
Operating Ambient Temperature 工作温度	T _{op}	-20~+85	°C
Junction and Storage Temperature 结温和储藏温度	T _J , T _{stg}	-40 to +125 °C	

■Device Marking & Test Circuit 产品打标和测试电路 FS431RM=431Test Circuit
for V_{KA} = V_{ref}Test Circuit
for V_{KA} > V_{ref}Test Circuit
for I_{K(off)}


■ Electrical Characteristics 电特性(V_{KA}=V_{REF} I_{KA}=10mA T_a=25°C unless otherwise noted 如无特殊说明)

Characteristic 特性参数	Symbol 符号	Test Condition 测试条件	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Reference Input Voltage 基准电压	0.3% 0.5% 1%	V _{REF}	V _{KA} =V _{REF} I _{KA} =10mA	2.488	2.495	2.502
				2.483	2.495	2.507
				2.470	2.495	2.520
Deviation of reference Input Voltage Over temperature 标准温度内基准电压偏差	ΔV _{REF} /ΔT	V _{KA} =V _{REF} I _{KA} =10mA -20 ~ +85°C		3	17	mV
Ratio of Change in Reference Input Voltage Change in Cathode Voltage 阴极电压与基准电压变化比	ΔV _{REF} /ΔV _{KA}	I _{KA} =10mA ΔV _{KA} =10V~V _{REF} ΔV _{KA} =36V~10V	-0.4 -0.4	0 0	2.7 2.0	mV/V
Reference Input Current 基准电流	I _{REF}	I _{KA} =10mA R ₁ =10kΩ, R ₂ =∞		1.8	4	μA
Deviation of Reference Input Current Over Full Temperature Range 标准温度内基准电流偏差	ΔI _{REF} /ΔT	I _{KA} =10mA R ₁ =10kΩ, R ₂ =∞ T _A =-20 ~ +85°C		0.4	1.2	μA
Minimum Cathode Current for Regulation 最小阴极电流	I _{KA(MIN)}	V _{KA} =V _{REF}		0.25	0.5	mA
Off-state Cathode Current 关闭状态阴极电流	I _{KA(OFF)}	V _{KA} =40V V _{REF} =0V		0.17	1.0	μA
Dynamic Impedance 输出阻抗	Z _{KA}	V _{KA} =V _{REF} I _{KA} =1 ~ 100mA f≤1kHz		0.27	0.5	Ω

■Typical Characteristic Curve 典型特性曲线

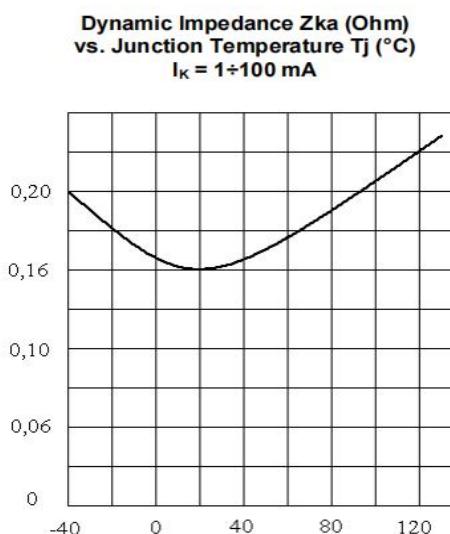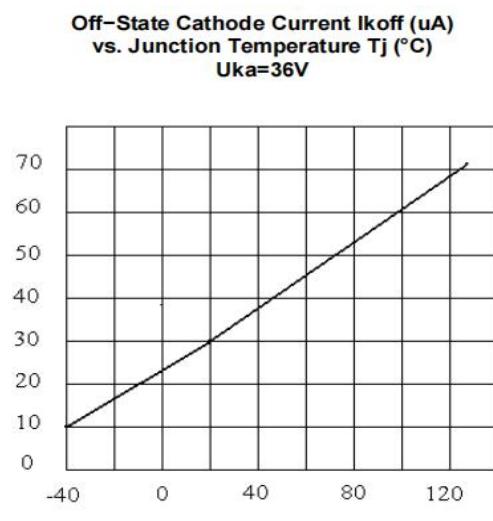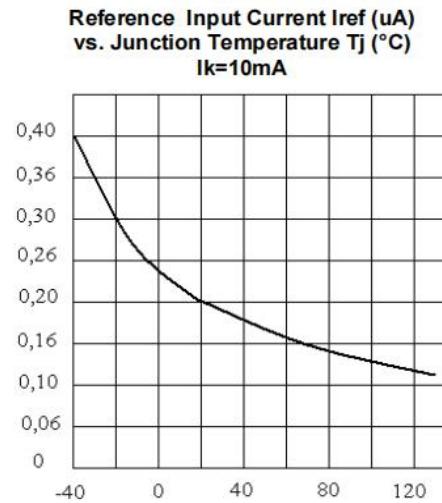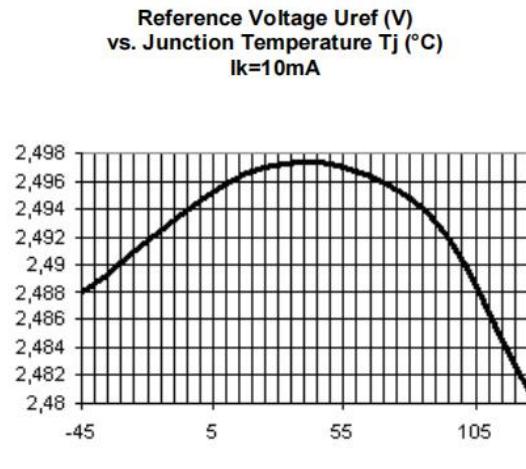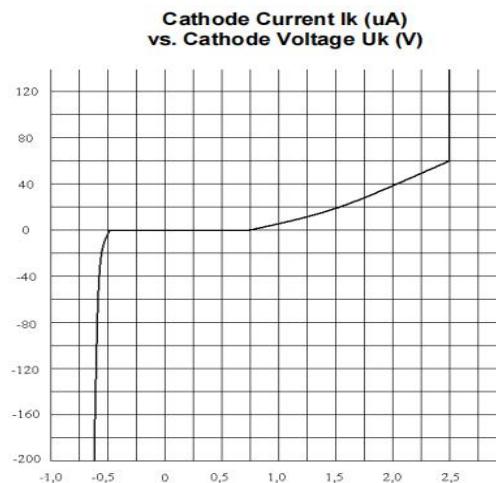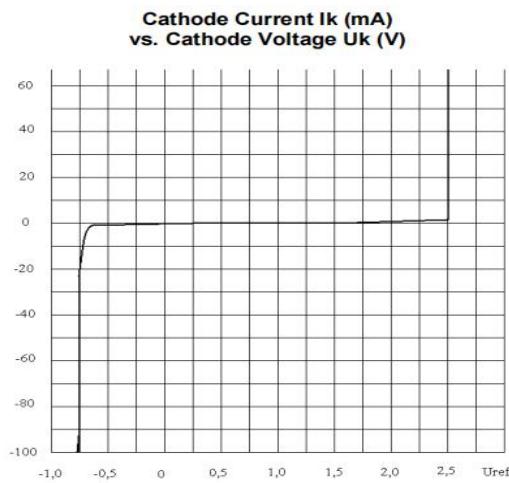

■SOT-23 Dimension 外形封装尺寸

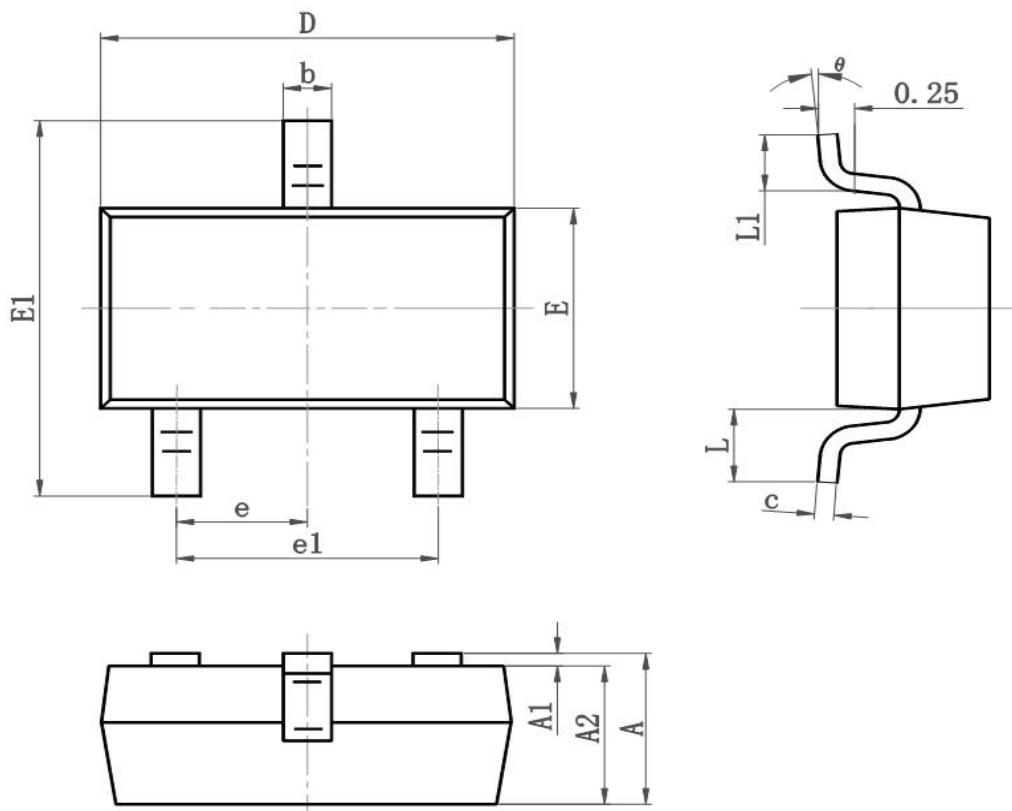

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.050	0.055
E1	2.250	2.550	0.089	0.100
e	0.900	1.00	0.035	0.039
e1	1.800	2.000	0.071	0.079
L	0.500	0.600	0.020	0.024
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°