


**SOD-123 General Purpose Rectifier Diode 通用整流二极管****■Features 特点**

Low forward voltage drop 低正向压降  
 Low reverse leakage current 低反向漏电流  
 High surge current capability 高浪涌电流能力  
 Surface mount device 表面贴装器件  
 Case 封装:SOD-123

**■Maximum Rating 最大额定值**

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	1A	2A	3A	4A	5A	6A	7A	Unit 单位
Peak Reverse Voltage 反向峰值电压	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
DC Reverse Voltage 直流反向电压	V <sub>R</sub>	50	100	200	400	600	800	1000	V
RMS Reverse Voltage 反向电压均方根值	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	V
Forward Rectified Current 正向整流电流	I <sub>F</sub>				1				A
Peak Surge Current 峰值浪涌电流	I <sub>FSM</sub>				25				A
Thermal Resistance J-A 结到环境热阻	R <sub>θJA</sub>				35				°C/W
Junction and Storage Temperature 结温和储藏温度	T <sub>J</sub> , T <sub>stg</sub>				150°C,-55to+150°C				

**■Electrical Characteristics 电特性**

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Test Condition 测试条件
Forward Voltage 正向电压	V <sub>F</sub>		0.92 0.98	1.1	V	I <sub>F</sub> =0.5A I <sub>F</sub> =1A
Reverse Current(T <sub>A</sub> =25°C/) 反向电流(T <sub>A</sub> =100°C/)	I <sub>R</sub>			5 50	uA	V <sub>R</sub> =V <sub>RRM</sub>
Diode Capacitance 二极管电容	C <sub>D</sub>		15		pF	V <sub>R</sub> =4V,f=1MHz

■Typical Characteristic Curve 典型特性曲线

Fig.1 Forward Current Derating Curve

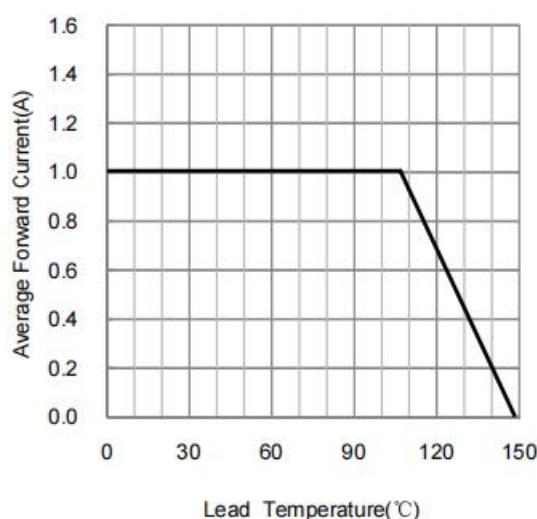


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

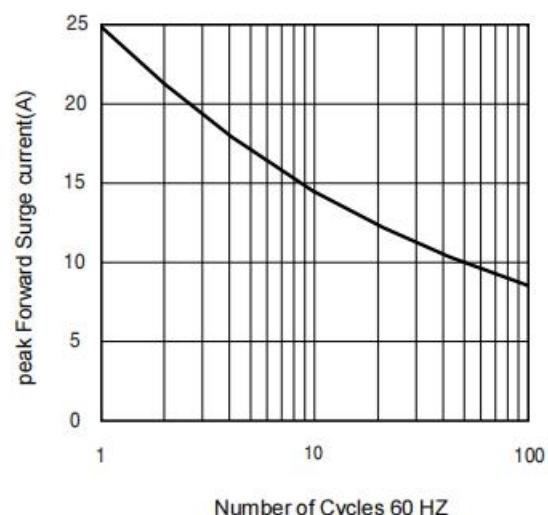


Fig.3 Typical Instantaneous Forward Characteristics



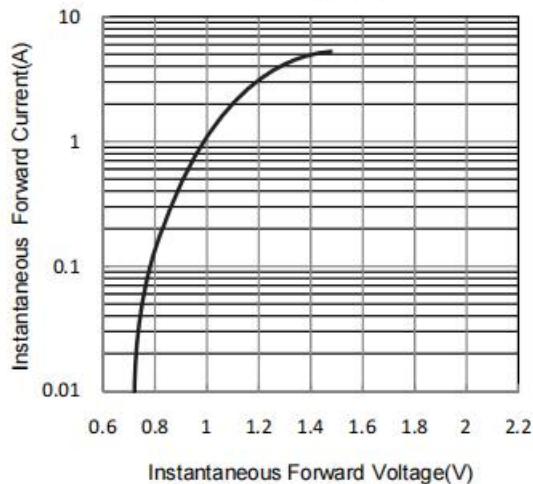


Fig.4 Typical Reverse Leakage Characteristics

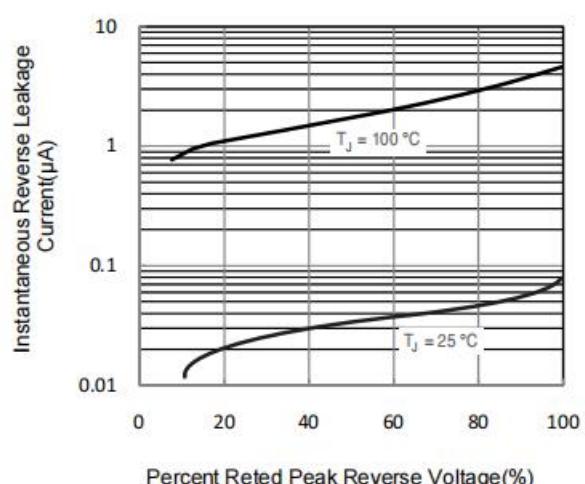

■ Dimension 外形封装尺寸

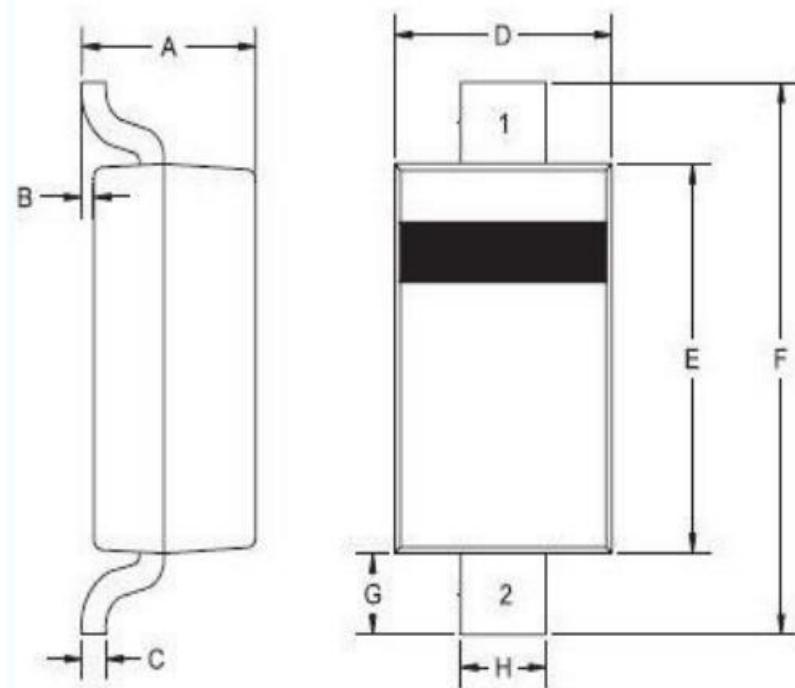

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.053	0.95	1.35
B	0.000	0.005	0.00	0.12
C	-	0.008	-	0.20
D	0.055	0.071	1.40	1.80
E	0.098	0.110	2.50	2.80
F	0.142	0.154	3.60	3.90
G	0.016	-	0.40	-
H	0.020	0.028	0.50	0.70